

FRONT TERMINAL BATTERY

6FM200F/12VOLT 200Ah

Front Terminal Series Batteries are specially designed for telecom use with 12+ years design life in float service. By adopting a new AGM separator and centralised venting system, the battery can be installed in any position while maintaining high reliability.

GENERAL FEATURES

- ☆ Heavy Duty Grid
- ☆ Mechanized assembly
- ☆ Non-spillable construction
- ☆ High Reliability and Stability
- ☆ Sealed and Maintenance-free
- ☆ Long Life and low self-discharge design

CONSTRUCTION


- ☆ Negative: Lead
- ☆ Positive: Lead dioxide
- ☆ Separator: Fiber glass
- ☆ Electrolyte: Sulfuric acid
- ☆ Safety Valve: EPDR
- ☆ Terminal: Copper
- ☆ Container: ABS(UL94-HB) / (UL94-V0)

SPECIFICATION

Battery Model	Nominal Voltage		12V	
	Rated capacity (10Hour rate)		200Ah	
	Cells Per battery		6	
Dimension	Length	Width	Height	Total Height
	560mm	125mm	316mm	316mm
Approx Weight	55.00Kg			
Internal Resistance	Full charged at 25°C(77°F): Approx 3.00mΩ			
Max.discharge current	1600A(5s)			
Floating design life @ 25°C (77°F)	12 years			
Capacity @ 25°C (77°F)	10Hour rate(20.0A/10.8V)	5Hour rate(34.0A/10.5V)	3Hour rate(50.0A/10.5V)	1Hour rate(110.0A/10.5V)
	200Ah	170Ah	150Ah	110Ah
Capacity affected by Temp(10 HR)	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C(5°F)
	102%	100%	85%	65%
Self Discharge @ 25°C (77°F)	After 3 months storage		After 12 months storage	
	93%		65%	
Charge method @ 25°C (77°F)	Cycle Use		14.70-14.90V (Max. charge current: 60.00A)	
	Float Use		13.60-13.80V	

OUTER DIMENSION (mm)

TERMINAL TYPE (mm)

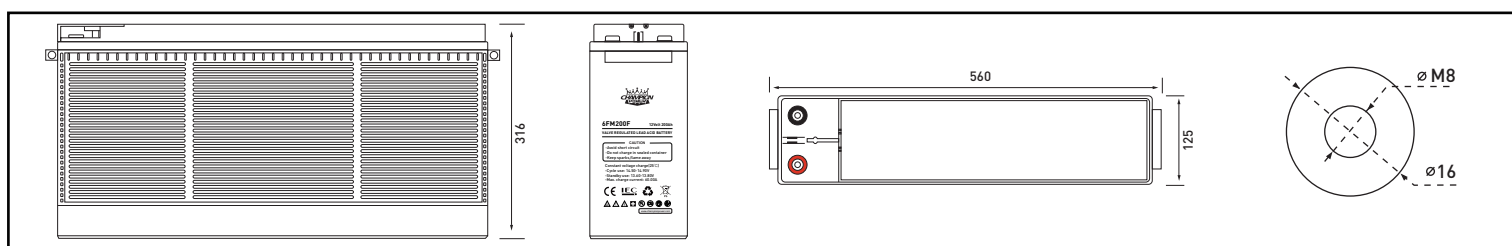


CONSTANT CURRENT(AMP) AND CONSTANT POWER(WATT) DISCHARGE TABLE AT 25°C (77°F)


F.V / TIME		5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	A	720.00	440.00	350.00	230.00	121.00	70.00	52.00	42.00	35.08	23.17	22.00	11.40
	W	7632.00	4672.80	3745.00	2484.00	1318.90	763.00	572.00	462.00	385.92	257.15	244.20	128.25
10.20V	A	660.00	422.00	321.67	218.33	120.00	67.17	51.00	40.00	34.42	22.80	21.00	11.20
	W	7194.00	4684.20	3586.58	2456.25	1350.00	758.98	576.30	454.00	390.63	258.78	238.35	127.12
10.50V	A	612.08	403.32	300.00	211.67	110.00	65.83	50.00	38.00	34.00	22.50	20.60	11.06
	W	6732.92	4537.35	3390.00	2412.99	1254.00	753.79	572.50	437.00	391.00	258.75	236.90	127.19
10.80V	A	557.33	399.84	280.00	202.00	114.00	64.17	49.00	37.33	32.50	21.92	20.00	10.92
	W	6130.67	4558.18	3206.00	2333.10	1316.70	741.12	568.40	434.93	378.63	255.33	233.00	127.22
11.10V	A	482.00	380.00	260.00	188.00	110.00	62.50	47.00	36.67	31.08	21.33	19.50	10.80
	W	5446.60	4389.00	3016.00	2199.60	1287.00	731.25	552.25	432.67	366.78	251.73	230.10	127.44

6FM200F/12Volt 200Ah


Discharge characteristic Curve

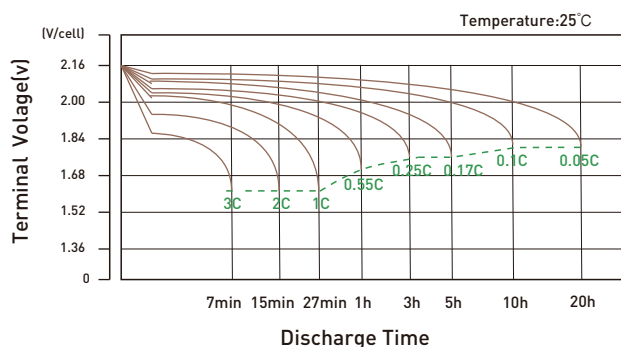


Charge Characteristic Curve For Standby Use

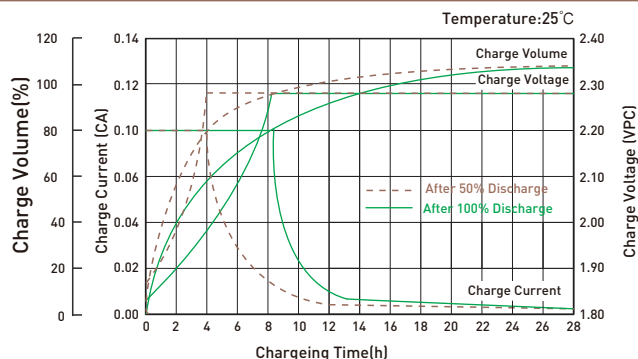


Cycle service life in relation to depth of discharge

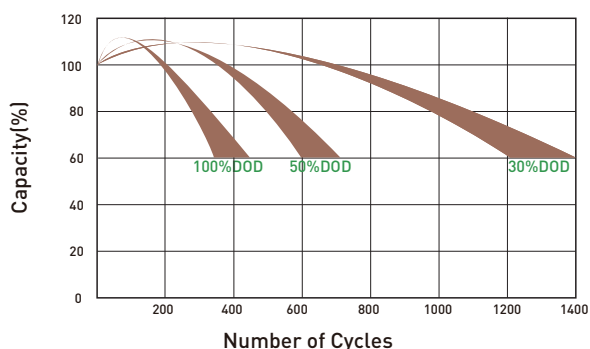


Relationship Between Charging Voltage And Temperature

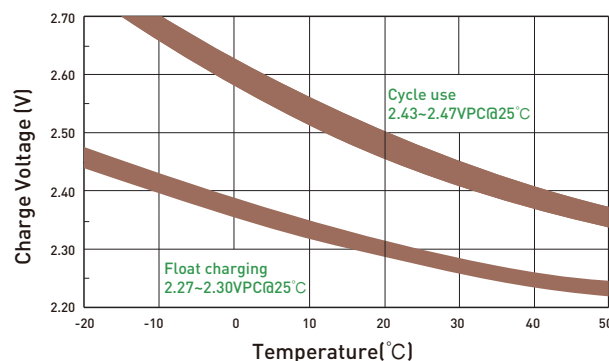


Temperature Effects On Capacity

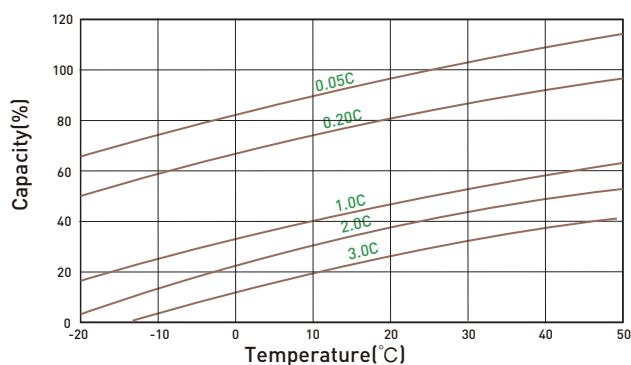

Storage Characteristics

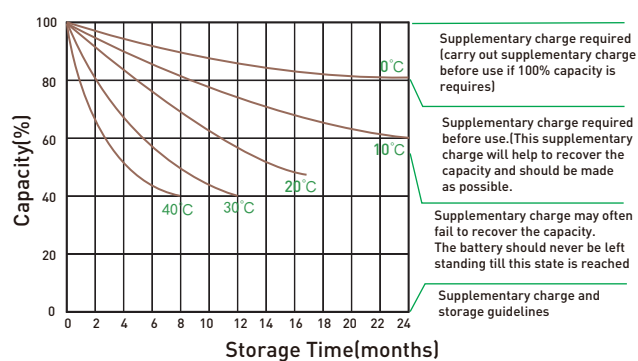

Effect Of emperature On Long Term Life

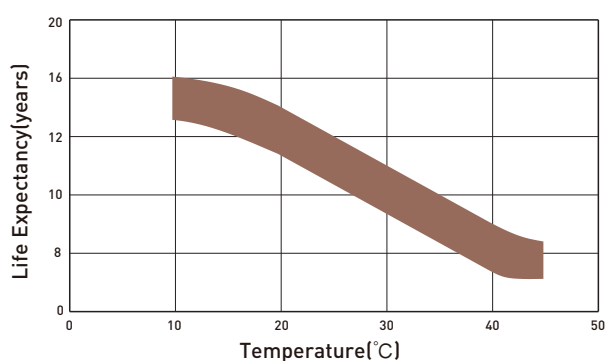

Charge Characteristic Curve For Standby Use

